

# HCW120D60D1Q

## eSiC Silicon Carbide Schottky Diode

1200V, 60A

### Description

The 1200V eSiC is an advanced Power Master Semiconductor's silicon carbide diode family. This technology combines the benefits of excellent low forward voltage and robustness. Consequently, the eSiC family is suitable for application requiring high power efficiency



### Applications

- Solar inverter, UPS
- EV charging station
- Power Factor Correction

### Features (Per Leg/Device)

$V_{RRM}$	$I_F$	$T_{J,max}$	$Q_C$
1200 V	30 / 60 A	175 °C	121 nC

- No reverse recovery current
- Low forward voltage
- 175°C Max junction temperature
- High surge current capability
- Switching behavior independent of temperature
- Pb-Free, Halogen Free and RoHS compliant



### Absolute Maximum Ratings (Per Leg / Device, Per Leg unless otherwise specified)

Symbol	Parameter		Value	Unit
$V_{RRM}$	Repetitive Peak Reverse Voltage	$T_C = 25^\circ\text{C}$	1200	V
$I_F$	Forward Current	$T_C = 129^\circ\text{C}$	30 / 60	A
$I_{F,SM}$	Non-Repetitive Forward Surge Current	$T_C = 25^\circ\text{C}, t_p = 10 \text{ ms}$	135	A
		$T_C = 150^\circ\text{C}, t_p = 10 \text{ ms}$	115	A
$I_{F,Max}$	Non-Repetitive Peak Forward Current	$T_C = 25^\circ\text{C}, t_p = 10 \mu\text{s}$	1180	A
		$T_C = 150^\circ\text{C}, t_p = 10 \mu\text{s}$	980	A
$I^2dt$ value	$\int i^2 dt$	$T_C = 25^\circ\text{C}, t_p = 10 \text{ ms}$	91	$\text{A}^2\text{s}$
		$T_C = 150^\circ\text{C}, t_p = 10 \text{ ms}$	66	$\text{A}^2\text{s}$
$P_{tot}$	Power Dissipation	$T_C = 25^\circ\text{C}$	217	W
$T_J, T_{STG}$	Operating Junction and Storage Temperature		-55 to +175	$^\circ\text{C}$

### Thermal Characteristics

Symbol	Parameter	Value	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case, Max.(Per Leg / Per Device)	0.69 / 0.35	$^\circ\text{C}/\text{W}$







**Package Marking and Ordering Information**

Part Number	Top Marking	Package	Packing Method	Quantity
HCW120D60D1Q	HCW120D60D1Q	TO-247	Tube	30 units

**Electrical Characteristics** (Per Leg,  $T_C = 25^\circ\text{C}$  unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
$V_F$	Forward Voltage	$I_F = 30\text{ A}, T_C = 25^\circ\text{C}$		1.63	1.95	V
		$I_F = 30\text{ A}, T_C = 175^\circ\text{C}$		2.0	-	
$I_R$	Reverse Current	$V_R = 1200\text{ V}, T_C = 25^\circ\text{C}$		-	100	$\mu\text{A}$
		$V_R = 1200\text{ V}, T_C = 175^\circ\text{C}$		-	300	
$Q_C$	Total Capacitive Charge	$V_R = 800\text{ V}, T_C = 25^\circ\text{C}$		121		nC
C	Total Capacitance	$V_R = 1\text{ V}, f = 100\text{ kHz}$		1357		pF
		$V_R = 800\text{ V}, f = 100\text{ kHz}$		85		
$E_C$	Capacitance Stored Energy	$V_R = 800\text{ V}, T_C = 25^\circ\text{C}$		34		$\mu\text{J}$

Typical Performance Characteristics (Per Leg)

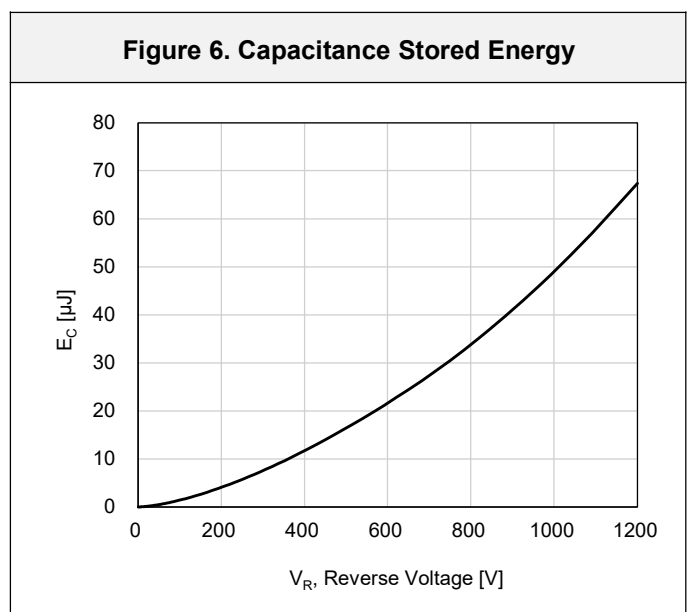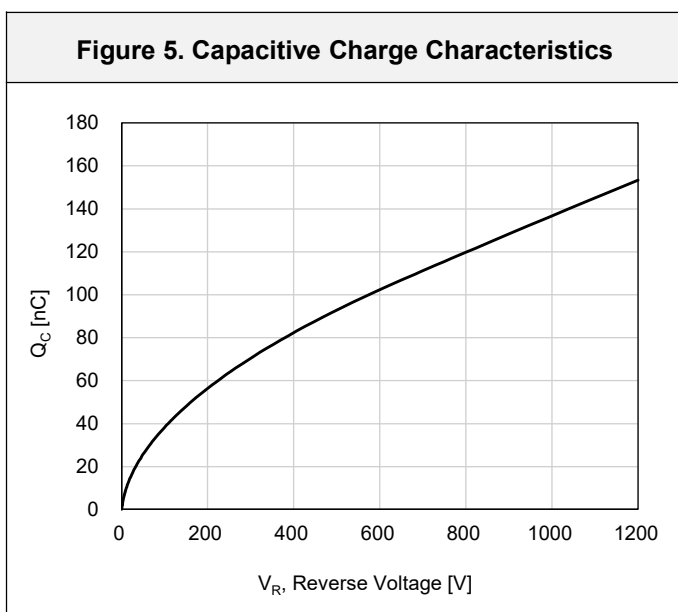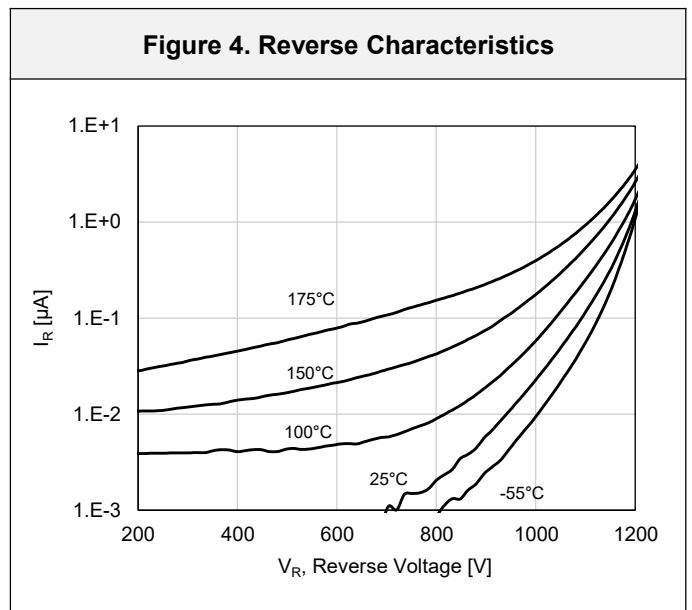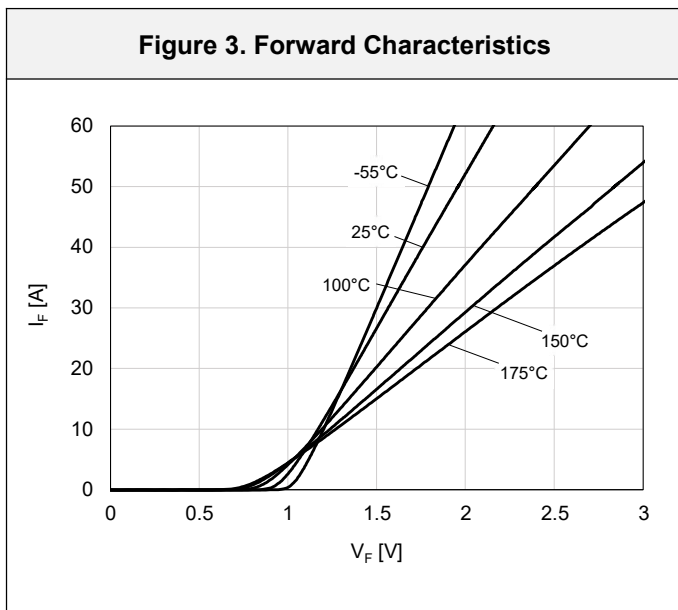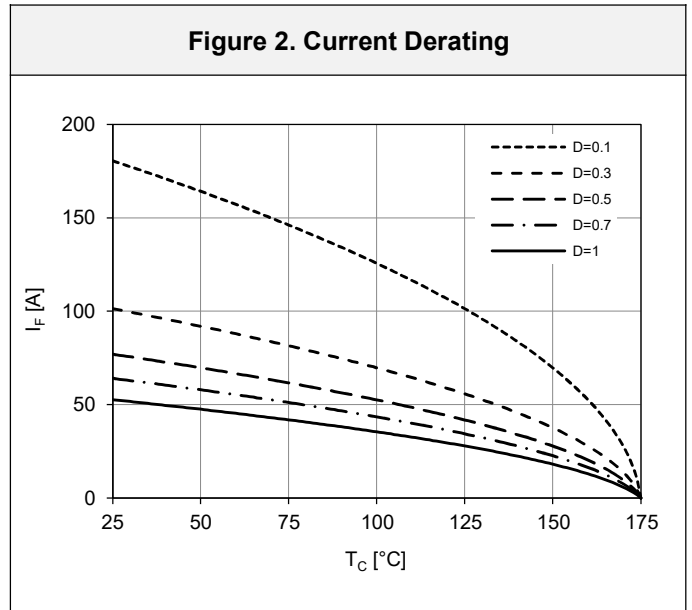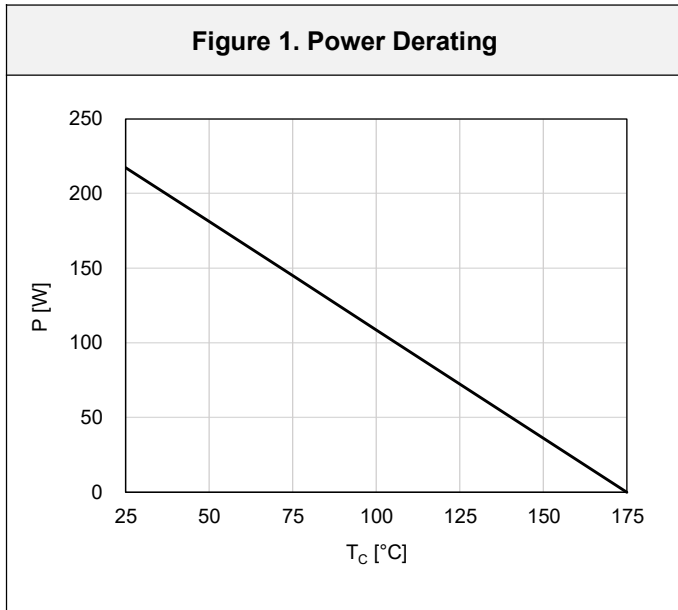

Typical Performance Characteristics (Per Leg)

Figure 7. Capacitance Characteristics



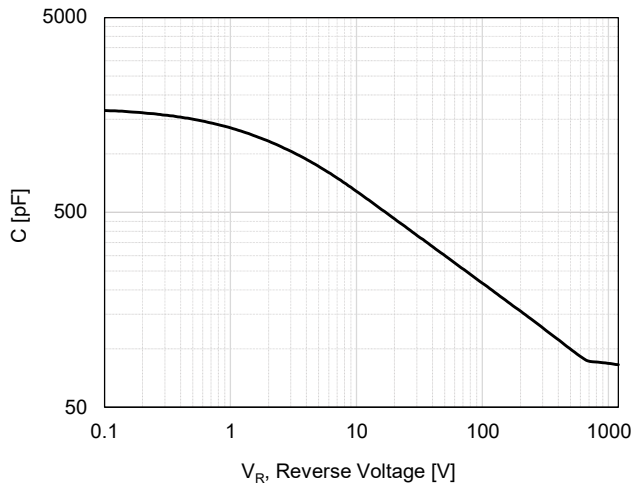


Figure 8. Transient Thermal Response Curve

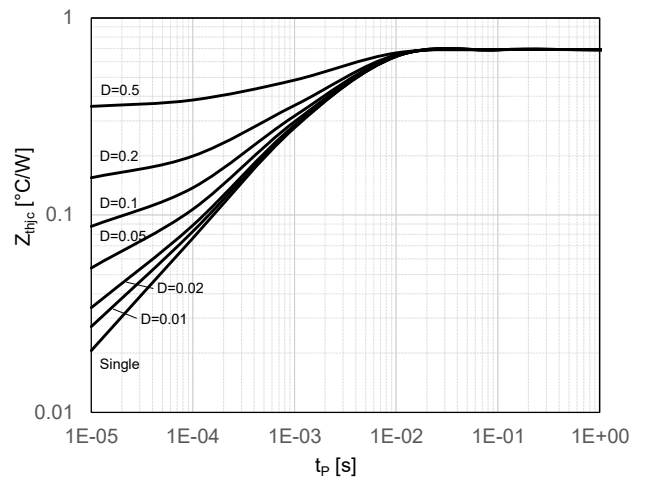

Package Outlines

TO-247

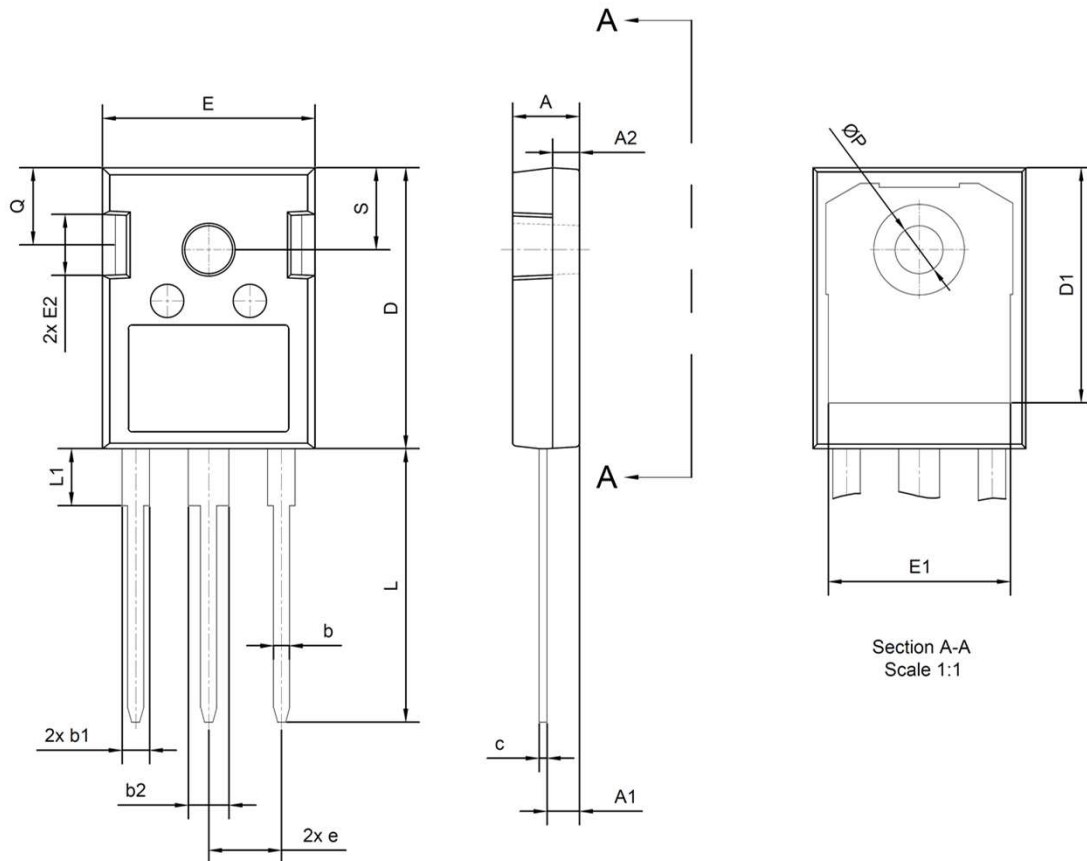

SYMBOL	Common		
	DIMENSIONS MILLIMETER		
	MIN.	NOM.	MAX.
A	4.80	5.00	5.20
A1	2.29	2.42	2.54
A2	1.90	2.00	2.10
b	1.10	1.20	1.30
b1	1.91	2.06	2.20
b2	2.92	3.06	3.20
c	0.50	0.60	0.70
D	20.80	21.07	21.34
D1	17.23	17.63	18.03
E	15.75	15.94	16.13
E1	13.46	13.66	13.86
E2	4.32	4.58	4.83
e	5.46 BSC		
L	19.85	20.05	20.25
L1	4.05	4.27	4.48
ØP	3.56	3.61	3.66
Q	5.38	5.79	6.20
S	6.15 BSC		